





SILICONE FIBERGLASS SLEEVING (OUTER SILICONE AND INNER GLASS FIBER)

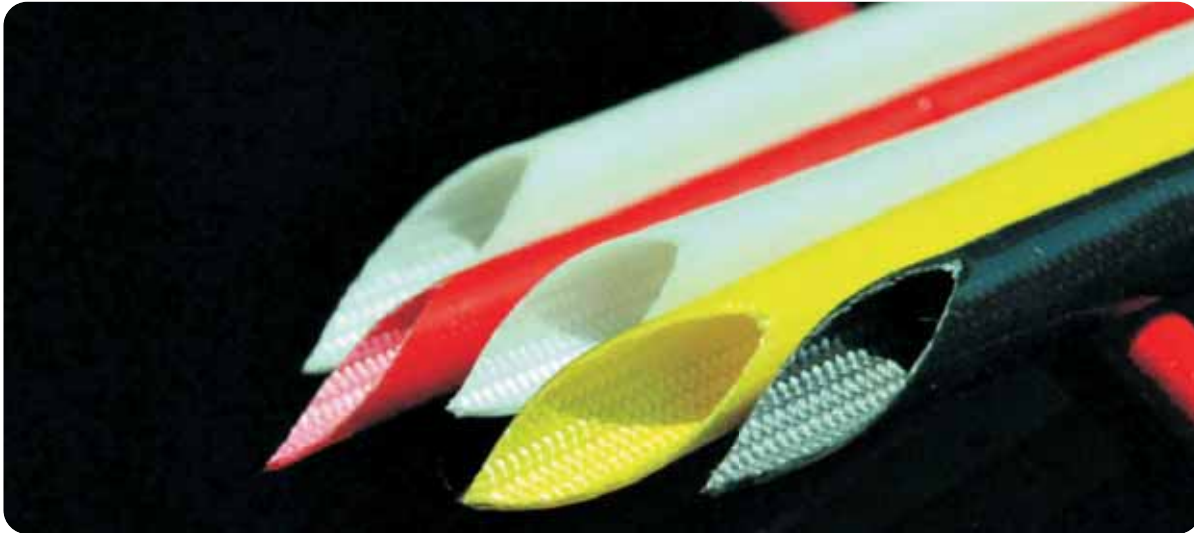

Silicone fiberglass sleeving (outer silicone and inner fiberglass) is made of the non-alkali fiberglass and coated by silicone with the process of thermal and vulcanization, that possesses good properties of dielectric high temperature resistance and cold resistance. It also provides abrasion and flame resistance with high flexibility.

Application

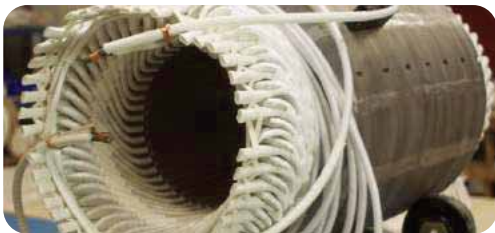

Drawing



It is commonly used in insulation and protecting household electrical appliances, electro heat devices, special illuminations etc, where is high working temperature and high voltage are required.

Datasheet					
Part No.	I.D. (l)	Tolerance	Wall thickness(t)		Packing (m)
			4KV	7KV	
MBQGJ-1.0	1.0	+0.3/-0.1	0.35±0.05	0.5±0.1	100
MBQGJ-1.5	1.5	+0.3/-0.1	0.35±0.05	0.5±0.1	
MBQGJ-2.0	2.0	+0.3/-0.1	0.45±0.05	0.5±0.1	
MBQGJ-2.5	2.5	+0.3/-0.1	0.45±0.05	0.5±0.1	
MBQGJ-3.0	3.0	+0.3/-0.1	0.45±0.05	0.5±0.1	
MBQGJ-3.5	3.5	+0.3/-0.1	0.50±0.05	0.5±0.1	
MBQGJ-4.0	4.0	+0.3/-0.1	0.50±0.05	0.6±0.1	
MBQGJ-4.5	4.5	+0.3/-0.1	0.50±0.05	0.6±0.1	
MBQGJ-5.0	5.0	+0.4/-0.1	0.50±0.05	0.6±0.1	
MBQGJ-5.5	5.5	+0.4/-0.1	0.50±0.05	0.6±0.1	
MBQGJ-6.0	6.0	+0.4/-0.1	0.55±0.05	0.6±0.1	
MBQGJ-7.0	7.0	+0.4/-0.1	0.55±0.05	0.6±0.1	
MBQGJ-8.0	8.0	+0.4/-0.1	0.60±0.05	0.7±0.1	
MBQGJ-9.0	9.0	+0.5/-0.1	0.70±0.05	0.8±0.1	
MBQGJ-10.0	10.0	+0.5/-0.1	0.70±0.05	0.8±0.1	
MBQGJ-11.0	11.0	+0.5/-0.1	0.70±0.05	0.8±0.1	
MBQGJ-12.0	12.0	+0.5/-0.1	0.70±0.05	0.8±0.1	
MBQGJ-13.0	13.0	+0.5/-0.1	0.70±0.05	0.8±0.1	
MBQGJ-14.0	14.0	+0.5/-0.1	0.70±0.05	0.8±0.1	
MBQGJ-15.0	15.0	+0.5/-0.1	0.70±0.05	0.8±0.1	
MBQGJ-16.0	16.0	+0.5/-0.1	0.70±0.05	0.8±0.1	

Technical data	
Sleeving material	Fiberglass fiber
Coating material	Silicone
Operating range	-60°C - +200°C
Breakdown voltage	4.0kV, 7.0kV
Flammability	VW-1
Standard colour	White, Black
Certificate	UL, RoHS.
Cutting tool	Cutting machine, Scissors

Notes:

- 1.The part No. will be followed with BK, GR and so on to indicate the color of sleeving.
- 2.It is also maybe followed by D, E to indicate the voltages, D=4KV, E=7KV.
- 3.Special packing, sizes, and colors can be supplied upon request.
- 4.All the numerical data are average or typical values, not including customized sizes.

Unit: mm



- Quarter Turn Locks
- Compression Locks & Latches
- Handle Locks
- Rod Control Locks
- Electronic Locks
- Canopy Locks, Handles & Door Stay
- Hinges
- 9 Fold Accessories
- Sealing Profiles
- Fan Filter
- Panel Fasteners
- Sleeve & Termination**
- Wiring Accessories
- Connectors