




Nylon Screw Plug

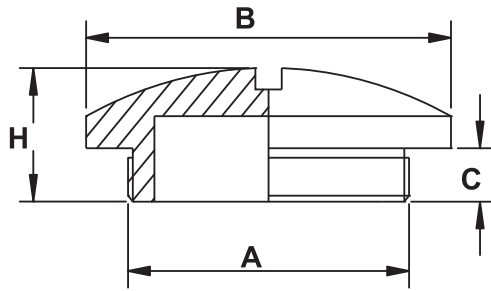

Thread: Metric, PG

Material: UL approved nylon 66, fireproof class 94V-2.

Protect grade: up to IP68, using washer and in the cable range

Color: black & white

Work T.: -40°C to 100°C, 120°C in a short time.

Products characteristics: good looking.

common impregnant resistant, such as water, salty, alcohol, oil, grease and so on.

Remarks: this items comes with locknut, but not including washer.

Unit:mm

Item No		Thread	Thread O.D. A	Panel Mounting Hole	Thread Length C	Thread Length H	size B	Std. Pkg. pcs
White	Black							
SP-M								
SP-M12W	SP-M12B	M12*1.5	12	12-12.3	9	12.5	15	100PCS
SP-M16W	SP-M16B	M16*1.5	16	16-16.3	9	13	19	
SP-M18W	SP-M18B	M18*1.5	18	18-18.3	9	13	22	
SP-M20W	SP-M20B	M20*1.5	20	20-20.3	9	13	25	
SP-M22W	SP-M22B	M22*1.5	22	22-22.3	10.5	15	27	
SP-M25W	SP-M25B	M25*1.5	25	25-25.3	10.5	15.5	30	50PCS
SP-M27W	SP-M27B	M27*1.5	27	27-27.3	10.5	15.5	33	
SP-M32W	SP-M32B	M32*1.5	32	32-32.3	10.5	16	38	
SP-M40W	SP-M40B	M40*1.5	40	40-40.3	11.5	16	46	30PCS
SP-M50W	SP-M50B	M50*1.5	50	50-50.3	13.5	18	56	
SP-M63W	SP-M63B	M63*1.5	63	63-63.3	14	19	68	
NSP-PG								
SP-PG7W	SP-PG7B	PG 7	12.5	12.5-12.8	9	12.2	15	100PCS
SP-PG9W	SP-PG9B	PG 9	15.2	15.2-15.8	9	13	19	
SP-PG11W	SP-PG11B	PG 11	18.6	18.6-18.9	9	13	22	
SP-PG13.5W	SP-PG13.5B	PG 13.5	20.4	20.4-20.7	9	13	25	
SP-PG16W	SP-PG16B	PG 16	22.5	22.5-22.8	10.5	15	27	
SP-PG21W	SP-PG21B	PG 21	28.3	28.3-28.7	10.5	15	33	30PCS
SP-PG29W	SP-PG29B	PG 29	37.0	37.0-37.4	11.5	16	44	
SP-PG36W	SP-PG36B	PG 36	47.0	47.0-47.4	13.5	18	55	
SP-PG42W	SP-PG42B	PG 42	54.0	54.0-54.4	13.5	18.5	62	
SP-PG48W	SP-PG48B	PG 48	59.3	59.3-59.7	14.5	19.5	68	

Quarter Turn Locks

Compression Locks & Latches

Handle Locks

Rod Control Locks

Electronic Locks

Canopy Locks, Handles & Door Stay

Hinges

9 Fold Accessories

Sealing Profiles

Fan Filter

Panel Fasteners

Sleeve & Termination

Wiring Accessories

Connectors

