




Type of Material : ABS
Standard color :RAL 7035, RAL 7032, other colors on request
Protection degree : Ip54
Fixing System : Snap Fitting
Plate Thickness : 1.5mm to 2.5mm
Storage Temperature : from -40°C to +70°C
Type of Filter Media : Thermo-Linked Progressive Structure
Filtering Class : Class G3, according to En779

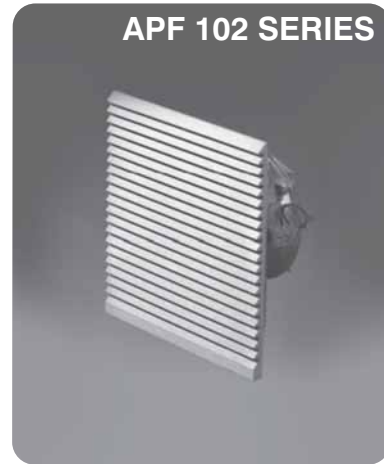

Quarter Turn Locks

Compression Locks & Latches

Handle Locks

Rod Control Locks

Electronic Locks

Canopy Locks, Handles & Door Stay

Hinges

9 Fold Accessories

Sealing Profiles





Fan Filter

Panel Fasteners

Sleeve & Termination

Wiring Accessories

Connectors

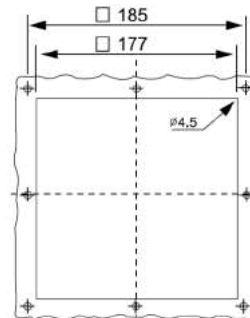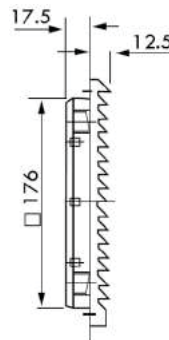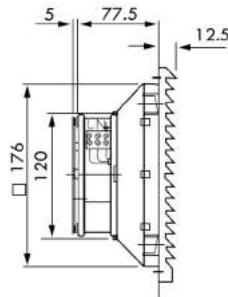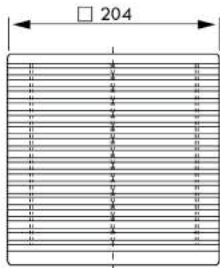


Fan and Filter APF 102---

Fan and Filter APF 102-01/11

Exit Filter APF 102

Installing Section APF 102---

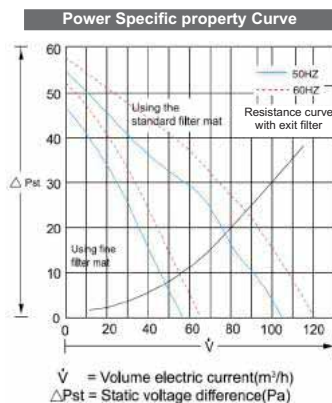

Fan and Filter	APF 202-01	APF 202-11
Voltage/Frequency	230/50/60	24(DC)
Air flow, Free blowing	105/120m ³ /h	
Air flow with Exit filter	71/82m ³ /h with APF-102	
Axial Fan	Self-start shielded pole motor	DC motor
Rated Current	0.14A/0.10A	0.30A
Power	22W/30W	7.2W
Noise Level	46/49dB(A)	
Scope of Temperature	-10°C~+55°C	
Exit filter	APF - 102	
Contact us if special Voltage required		

