



Copper Foil Shielding Sleeving




Copper foil shielding sleeving is woven with copper foil monofilament, it is used in different electrical and industrial fields, where EMI shielding, excellent protection and lightweight properties are required. It is lighter and more flexible than tinned copper braided sleeving, so it can be a perfect combination of economy and durability.

Application



Drawing

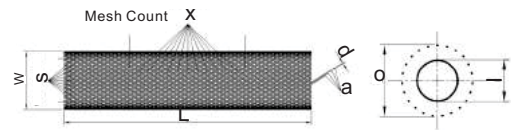

It is widely used in communication system, electronic medical equipments, military equipments as well.

Datasheet

Part No.	Nominal size (W)	Expanded range		Packing (m)
		Min.(I)	Max.(O)	
SES-004	4	3	7	300
SES-006	6	4	9	200
SES-008	8	6	12	200
SES-010	10	7	16	150
SES-012	12	8	20	100
SES-015	15	10	23	100
SES-020	20	13	28	100
SES-025	25	18	32	100
SES-030	30	20	40	50
SES-040	40	30	50	50
SES-050	50	40	60	50

Unit: mm

Technical data

Material	Copper filament
Operating range	-40°C- +150°C
Standard color	Tinned color
Certificate	RoHS
Other features	Resists gasoline and engine chemicals
Cutting tool	Scissors

Notes:

- 1.Nominal size indicates the flat width.
- 2.All the numerical data are average or typical values, not including customized sizes.
- 3.Special packages and sizes can be supplied upon request.

