




- Quarter Turn Locks
- Compression Locks & Latches
- Handle Locks
- Rod Control Locks
- Electronic Locks
- Canopy Locks, Handles & Door Stay
- Hinges
- 9 Fold Accessories
- Sealing Profiles
- Fan Filter
- Panel Fasteners
- Sleeve & Termination
- Wiring Accessories
- Connectors

SS H-FIX SERIES - DOME HEAD



Material : Steel
Finish : Zinc Plating

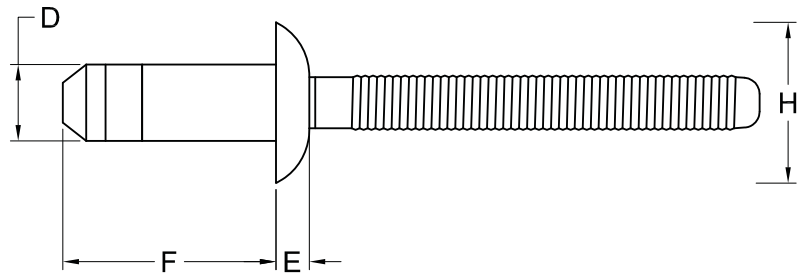

D	Art. Code	F			H	E Max.	Hole Size	Shear* N	Tensile* N
		mm	Inch	mm					
6.4 1/4"	SS-HFIX 0812	13.7	0.059 ~ 0.139	1.50 ~ 3.50	13.4	2.7	6.7 ~ 6.9	10500	8800
	SS-HFIX 0813	15.1	0.110 ~ 0.189	2.80 ~ 4.80				12000	8800
	SS-HFIX 0814	15.6	0.132 ~ 0.211	3.35 ~ 5.35				12500	8800
	SS-HFIX 0815	17.0	0.189 ~ 0.268	4.80 ~ 6.80				12500	8800
	SS-HFIX 0817	19.0	0.268 ~ 0.346	6.80 ~ 8.80				14000	8800
	SS-HFIX 0818	19.7	0.295 ~ 0.374	7.50 ~ 9.50				15000	8800
	SS-HFIX 0819	21.0	0.346 ~ 0.425	8.80 ~ 10.8				16000	8800
	SS-HFIX 0821	23.0	0.425 ~ 0.504	10.8 ~ 12.8				16000	8800

Shear Strength and Tensile Strength marked * are typical values