Quarter Turn Locks
Compression Locks & Latches
Handle Locks
Rod Control Locks
Electronic Locks
Canopy Locks, Handles & Door Stay
Hinges
9 Fold Accessories
Sealing Profiles
Fan Filter
Panel Fasteners
Sleeve & Termination
Wiring Accessories
Connectors

MS807-1

MS807-2

MS807-3

R L IP54

Main material and finish:
Bright chrome plated ZDC handle, housing, insert and dust tight cap, white Zinc-plated steel cam, teeth washer, and shaft

Application:
Cam adjustable

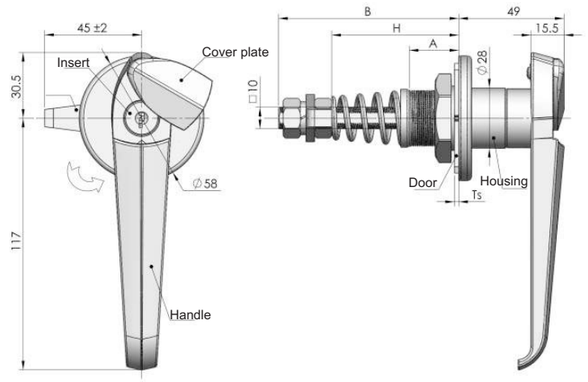

MS807-1

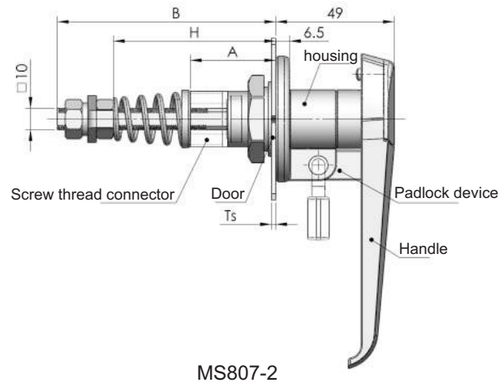

MS807-2

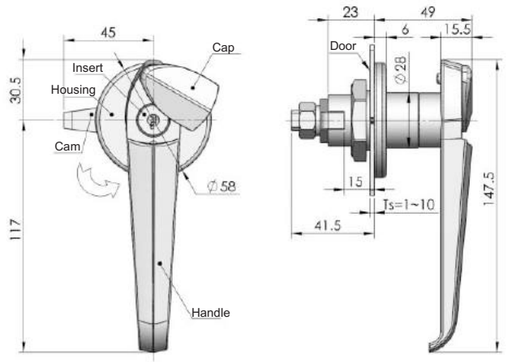

MS807-3

Default cam



Remarks :
Default cam drawing cut out is square 10mm, other cam selection refer to cam list



Cut out



Note :
if it is used for 60 RH and LH, the door can be openned both right and left through housing 180 rotation assembling position, it is the dorsal view after lock is assembled on the door

Specification		MS807-1 Series	
		Bright chrome-plated ZDC housing, handle,cap	S.S housing, handle, cap
		Model	Model
A=23 B=83 H=45~58	60°For RH an LH	MS807-1	MS807-1B
	90°RH	MS807-1-Y	
	90°LH	MS807-1-Z	
A=40 B=103 H=52~75	60°For RH an LH	MS807-1-D1	MS807-1B-1
	90°RH	MS807-1-Y1	
	90°LH	MS807-1-Z1	
A=63 B=103 H=75~80	60°For RH an LH	MS807-1-D2	MS807-1B-2
	90°RH	MS807-1-Y2	
	90°LH	MS807-1-Z2	

Specification		MS807-2 Series	
		Bright chrome-plated ZDC housing, handle,cap	S.S housing, handle, cap
		Model	Model
A=23 B=83 H=45~58	60°For RH an LH		
	90°RH	MS807-2-Y	
	90°LH	MS807-2-Z	MS807-2B-Z

Specification		MS807-3 Series	
		Bright chrome-plated ZDC housing, handle,cap	S.S housing, handle, cap
		Model	Model
	60°For RH an LH	MS807-3	MS807-3B
	90°RH	MS807-3-Y	MS807-3B-Y
	90°LH	MS807-3-Z	MS807-3B-Z