


**DOME HEAD**

**TOP RIVET: SS-CFIX Series**

MATERIAL:

Body : Steel  
Mandrel : Steel



FINISH:

Body : Zinc Plated  
Mandrel : Zinc Plated


D Nom.	Art.Code	F Max.	Grip Range		H Max.	E	Drill No. Hole Size	Shear LBS	Tensile LBS	Remark
			inch	mm						
4.8 3/16"	SS-CFIX 0604	18.2	.064" ~ .250"	1.63 ~ 6.86	10.1	2.29	#10 4.93 ~ 5.18	1300 5785 N	1000 4450 N	2771-0613
	SS-CFIX 0607	24.4	.064" ~ .437"	1.63 ~ 11.10						2771-0617
6.4 1/4"	SS-CFIX 0806	23.7	.080" ~ .375"	2.03 ~ 9.53	13.3	2.9	G 6.6 ~ 7.0	2400 10675 N	1850 8230 N	2771-0817
	SS-CFIX 0810	32.9	.080" ~ .625"	2.03 ~ 15.87						2771-0824

**CSK HEAD**

**TOP RIVET: SS-CFIX Series**

MATERIAL:

Body : Steel  
Mandrel : Steel

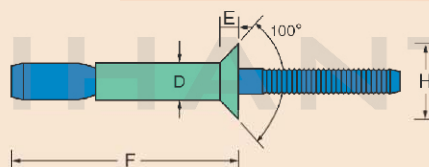

FINISH:

Body : Zinc Plated  
Mandrel : Zinc Plated

D Nom.	Art.Code	F Max.	Grip Range		H Max.	E	Drill No. Hole Size	Shear LBS	Tensile LBS	Remark
			inch	mm						
4.8 3/16"	SS-CFIX 0606C	20.0	.125" ~ .331"	3.17 ~ 8.41	8.5	2.2	#10 4.93 ~ 5.18	1300 5785 N	1000 4450 N	2761-0615
	SS-CFIX 0608C	26.2	.125" ~ .481"	3.17 ~ 12.22						2761-0619
6.4 1/4"	SS-CFIX 0808C	26.3	.125" ~ .475"	3.17 ~ 12.07	10.1	2.4	G 6.6 ~ 7.0	2400 10675 N	1850 8230 N	2761-0821